
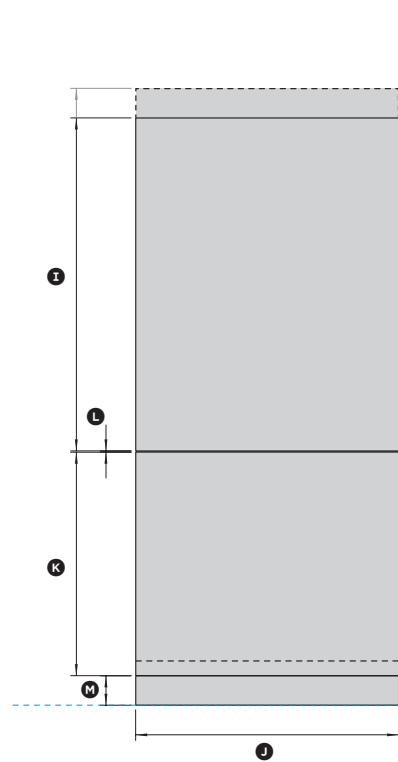



# FISHER & PAYKEL

## DATA SHEET 914mm ActiveSmart Built-In Fridge


0 100 200 400  
millimetres

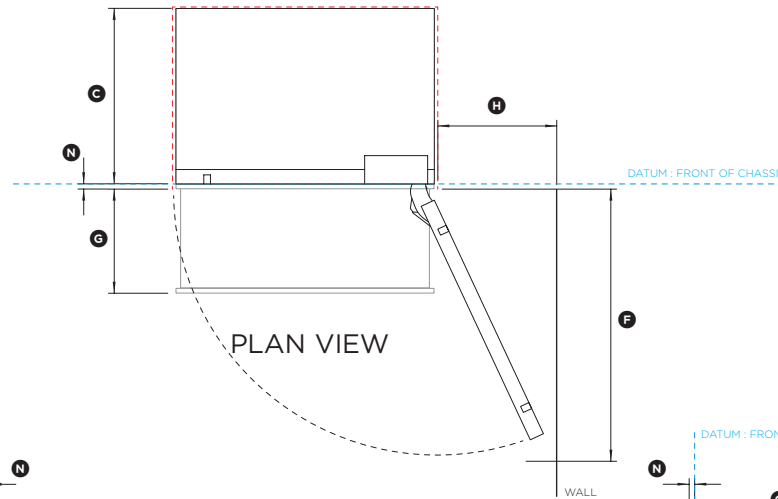

CUSTOM PANELS

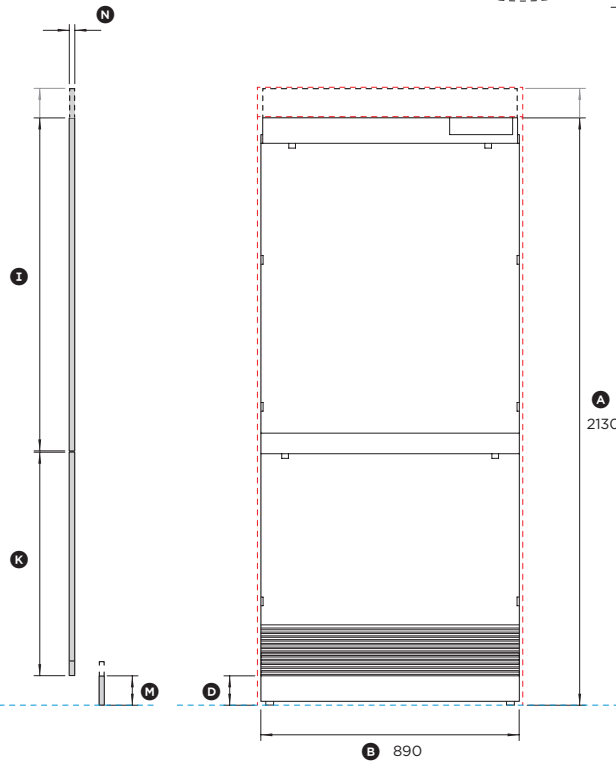

FRONT VIEW

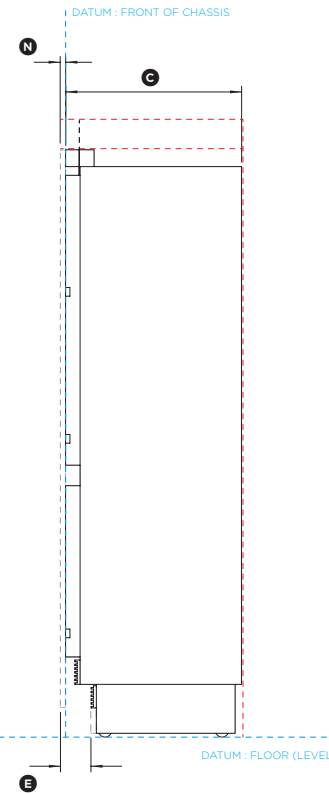

PROFILE VIEW

Model no:

**RS9120WRJ1, RS9120WLJ1**

Note: Left hand hinge model is a mirrored version of image shown.

Product Dimensions	mm
Ⓐ Overall height of fridge	2028 / 2130
Ⓑ Overall width of fridge	890
Ⓒ Overall depth of fridge (excl. front door panels)	606
Ⓓ Height from bottom datum to top of toekick	102 - 152
Ⓔ Depth of toekick (19mm panels shown)*	71 - 101
Ⓕ Depth of door (widest opening) measured from front of cabinetry	940
Ⓖ Depth of drawer (open) measured from front of cabinetry*	360
Ⓗ Minimum door clearance** to adjacent wall (115° - full internal access)*	410

\* Door panels to be manufactured & fitted by cabinetmaker, thickness min 16mm - max 25mm.

\*\* Measured from front cabinetry edge.

Custom Panel Dimensions	mm
Ⓘ Height of top door panel	1150 / 1252
Ⓚ Width of door panels	906
Ⓛ Height of bottom drawer panel	722 - 772
Ⓛ Gap between top door panel and bottom drawer panel	4
Ⓜ Height of toekick panel*	102 - 152
Ⓨ Depth of custom panels	min 16 max 25
Maximum weight of top door panel	20kg
Maximum weight of bottom drawer panel	11kg

\* The bottom grille can be reduced to allow for a higher toekick. Adjust the height of the bottom drawer panel accordingly.

Clearance Dimensions	mm
Minimum cabinetry gap from edge of custom panels	4
Overall height of cavity	2032 / 2134
Overall width of cavity	914
Overall minimum depth of cavity	629

INDICATES CABINETRY / PRODUCT DATUM -----  
INDICATES CABINETRY CLEARANCES - - - - -

DATE: 05.05.2017

IMPORTANT NOTE: Throughout this guide, dimensions may vary by  $\pm 2\text{mm}$  (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)