


24" Series 11 Integrated Column Refrigerator

Series 11 | Integrated

Panel Ready | Left hinge

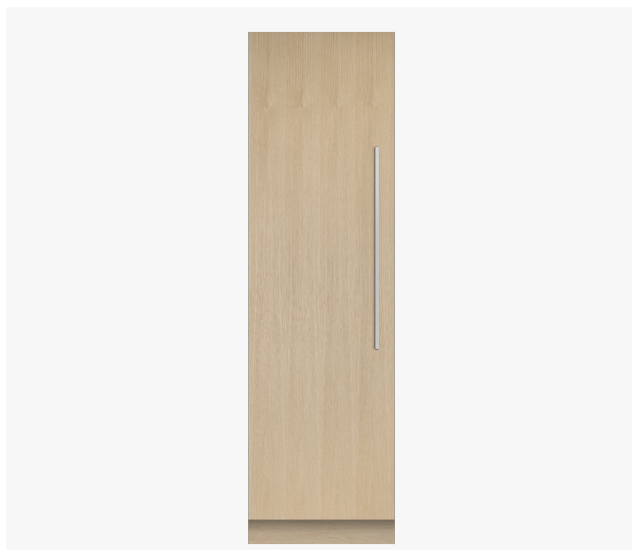


<p>Install it separately or pair with another Column for seamless integration - this model is left hinge with stainless steel interior.</p>

- ActiveSmart™ technology helps keep food fresher for longer by constantly maintaining the ideal temperature
- Two separate Variable Temperature Zones: each with Fridge, Pantry or Chill
- Customize with your own kitchen cabinetry or purchase our stainless steel door panel accessory

DIMENSIONS

Height	84 "
Width	23 3/4 "
Depth	24 "

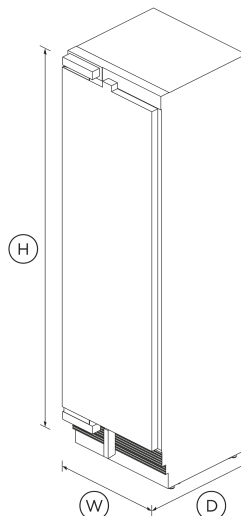

FEATURES & BENEFITS

Variable Temperature Zones

Food is stored in two separate zones. You have the choice of three food modes: Fridge 32°F to 44°F, Pantry 52°F to 56°F and Chill 29°F to 32°F.

Mix & Match

Integrated Column Refrigeration gives you the freedom to mix and match. Different sized Column Fridges and Freezers can be installed separately or paired. Finish them with our stainless steel door panels or customize to match your own kitchen cabinetry.

Clever Energy

Our Energy Star certified ActiveSmart™ Foodcare Fridges & Freezers adapt to daily use by cooling and defrosting only when needed. This means your refrigerator uses the energy it needs without compromising on food care.

Appealing Illumination

Bright LEDs light up the ceiling, shelves, bins and tray in both refrigerator and freezer, making it easy to find your food and creating a welcoming glow in your kitchen for those midnight snacks.

Design Quality

The premium design and quality finish includes a steel interior lining as well as soft-close, full extension metal shelf runners for easy access and robust glass shelving.

Easy Install

Integrated Column Refrigerators and Freezers have been developed to make their installation easy. The joiner kit is included when pairing refrigerator and freezers. All models come with front adjustable levelling feet and they've been designed to easily slide into place as separate units.

Perfect Fit

These models fit flush and have only 1/8" gaps around them with no visible hinges or grilles. Our Integrated Column models can be seamlessly hidden behind your cabinetry or you can purchase our stainless steel door panel.

SPECIFICATIONS

Accessories (sold separately)

Door panel stainless steel Left hinge 84"	RD2484L4D
Door panel stainless steel Right hinge 84"	RD2484R4D
Handle kit Classic	AHCLRDSF
Handle kit Contemporary round, aluminium	AHSRDSF
Handle kit Contemporary square fine, aluminium	AHD5RDSF
Handle kit Contemporary square fine, black	AHD5RDSFB
Handle kit Professional round flush	AHP3RDSF
Handle kit Professional round flush, Brass off-stands	AHP3RDSFBA
Handle kit Professional round flush, Dark Copper off-stands	AHP3RDSFDC
Joiner Kit	AJ-RS84LR
Stainless steel door panel	24" Left hinge RD2484L4D
Toe kick stainless steel 24"	AKRS2404
Toe kick stainless steel 42"	AKRS4204
Toe kick stainless steel 48"	AKRS4804
Toe kick stainless steel 54"	AKRS5404
Toe kick stainless steel 60"	AKRS6004
Toe kick stainless steel 66"	AKRS6604
Toe kick stainless steel 72"	AKRS7204
Toe kick stainless steel 78"	AKRS7804
Toe kick stainless steel 84"	AKRS8404

Capacity

Total gross capacity	12.4 cu ft
Volume	12.4 cu ft
Volume refrigerator	12.4 cu ft

Consumption

Energy rating	Energy star
Energy usage	232kWh/year
In-use energy carbon emissions estimate	85.0kgCO2e/year

Features

Adjustable door shelves	4
Adjustable glass cantilevered shelves	•
Covered door shelves	1
Door alarm	•
Fruit and vegetable bins	4
Gallon door shelves	1
LED bin lighting	•
LED ceiling lighting	•
LED lighting	•
LED side lighting	•
SmartTouch interface at counter height	•
Soft-close fruit and vegetable bins	•
Stackable bottle holders	4

Performance

ActiveSmart™ Foodcare	•
Dual evaporator	•
Frost free	•
Humidity control system	•
Inverter controlled compressor	•
Sabbath mode	•
Variable food modes	Pantry; Fridge; Chill
Variable temperature zones	2

Power Requirements

Rated current	10 A
Supply frequency	60 Hz
Supply voltage	115 V

Product Dimensions

Depth	24 "
Height	84 "
Width	23 3/4 "

Product information

Packaged weight	275 lbs
Unpackaged weight	258 lbs

Safety and compliance

ADA compliant	•
---------------	----------

Warranty

Parts and labor	2 years
Sealed system parts & labor	additional 3 years

SKU	26120
-----	--------------

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020

- [↓ SketchUp Refrigerator](#)
- [↓ SketchUp Refrigerator](#)
- [↓ Specification Guide Integrated Column Refrigerator](#)
- [↓ User Guide EN](#)
- [↓ User Guide](#)

Other product downloads available at fisherpaykel.com

- [↓ 2D-DWG Integrated Column Refrigerator](#)
- [↓ 2D-DXF Integrated Column Refrigerator](#)
- [↓ Data Sheet Integrated Column Refrigerator](#)
- [↓ Data Sheet Integrated Column Refrigerator Dual Install \(18" + 24"\)](#)
- [↓ Data Sheet Integrated Column Refrigerator Dual Install \(24" + 24"\)](#)
- [↓ Data Sheet Integrated Column Refrigerator Dual Install \(24" + 30"\)](#)
- [↓ Energy Label](#)
- [↓ Service & Warranty](#)
- [↓ Installation Guide](#)
- [↓ Installation Guide Toe Kick](#)
- [↓ Guide d'installation - Instructions de Remplacement du Filtre à Eau FR](#)
- [↓ Installation Guide](#)
- [↓ Key Purchase Decisions Integrated Columns](#)
- [↓ Planning Guide Professional Style Dial/Handle Accessories](#)
- [↓ Planning Guide Integrated Columns](#)
- [↓ Revit Refrigerator](#)
- [↓ Rhino Refrigerator](#)
- [↓ Rhino Refrigerator](#)
- [↓ Rhino Refrigerator](#)
- [↓ Rhino Refrigerator](#)
- [↓ Rhino Refrigerator](#)
- [↓ Rhino Refrigerator](#)
- [↓ SketchUp Refrigerator](#)
- [↓ SketchUp Refrigerator](#)
- [↓ SketchUp Refrigerator](#)

Where applicable:

All appliances use energy, and energy usage typically generates carbon emissions. **Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate** indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.



A PEACE OF MIND SALE
24 Hours 7 Days a Week Customer Support
 T 1.888.936.7872 **W**www.fisherpaykel.com