

# 60cm Series 3 Telescopic Wall Rangehood

Series 3 | Contemporary

White




The wall chimney rangehood has contemporary styling, extracting steam, grease and cooking odours quietly and efficiently.

- With two fan speeds, select the ideal extraction rate for your cooking
- Slides out for use when you need it, with maximum air movement of 340m<sup>3</sup>/hr
- Dishwasher safe filters that are easy to remove and clean

## DIMENSIONS

Height	181-185 mm
Width	598 mm
Depth	280-460 mm

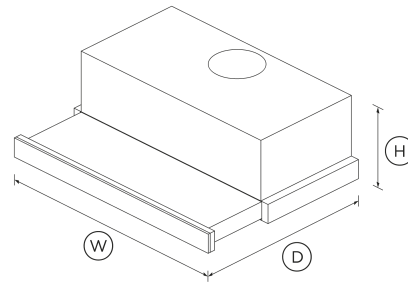

## FEATURES & BENEFITS

### Easy Installation

This rangehood can be either externally ducted through the top or back or can recirculate air internally through its filters, making it perfect for apartments.

### Easy To Use

Simply flick a switch to turn this rangehood on or off, or to change the extraction speed. A separate switch controls the bright halogen lights to provide illumination over your cooking surface.

### Easy Cleaning

Two filters, consisting of layers of aluminium mesh, effectively trap grease particles during extraction. They are easy to remove and dishwasher safe, or can be cleaned by hand in hot soapy water.

### Seamless Integration

This rangehood can be built into your cabinetry for a seamless look. Its stainless steel finish is designed to match the rest of Fisher & Paykel's kitchen appliance family.

## SPECIFICATIONS

### Accessories (included)

Aluminium filter	792391
------------------	--------

### Accessories (sold separately)

Eave ducting kit	PD-RHK125E
Light bulb	791822
Recirculation carbon filter	792390
Roof ducting kit	PD-RHK125T
Side wall ducting kit	PD-RHK125W

### Fan ratings

Maximum air movement	340 m <sup>3</sup> /hr
Maximum sound rating	66 dBA

### Installation and cleaning

Air outlet size	120 mm
Dishwasher safe filters	2

Ducted **Top extraction only**

### Performance

Extraction type	<b>Surface</b>
Fan speeds	<b>2</b>
Filter type	<b>Mesh</b>
Number of filters	<b>2</b>

### Power requirements

Supply frequency	<b>50 Hz</b>
Supply voltage	<b>220-240 V</b>

### Product dimensions

Depth	<b>280-460 mm</b>
Height	<b>181-185 mm</b>
Width	<b>598 mm</b>

### Product information

Control type	<b>Switch</b>
--------------	---------------

### Ventilation features

Light type	<b>LED</b>
------------	------------

SKU	<b>50016</b>
-----	--------------

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020

### Other product downloads available at [fisherpaykel.com](https://fisherpaykel.com)

- [↓ Service & Warranty](#)
- [↓ Installation Guide](#)
- [↓ User Guide](#)

### Where applicable:

All appliances use energy, and energy usage typically generates carbon emissions. **Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate** indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.



**A PEACE OF MIND SALE**  
24 Hours 7 Days a Week Customer Support

T 1300 650 590 [Wwww.fisherpaykel.com](https://www.fisherpaykel.com)