
Integrated Column Refrigerator, 24"



Install it separately or pair with another Column for seamless kitchen integration – this model is left hinge with stainless steel interior.

- ActiveSmart™ technology helps keep food fresher for longer by constantly maintaining the ideal temperature.
- Two separate Variable Temperature Zones: each with Fridge, Pantry or Chill
- Customize with your own kitchen cabinetry or purchase our stainless steel door panel accessory

DIMENSIONS

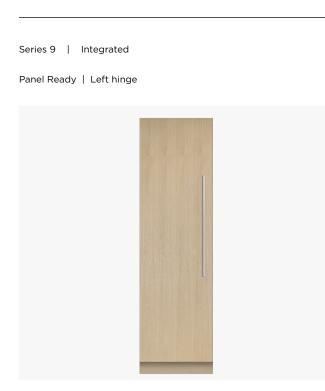

FEATURES & BENEFITS

Variable Temperature Zones

Food is stored in two separate zones. You have the choice of three food modes: Fridge 32°F to 44°F, Pantry 52°F to 56°F and Chill 29°F to 32°F.

Mix & Match

Integrated Column Refrigeration gives you the freedom to mix and match. Different sized Column Fridges and Freezers can be installed separately or paired. Finish them with our stainless steel door panels or customize to match your own kitchen cabinetry.

Clever Energy

Our Energy Star-certified ActiveSmart[™] Refrigerators & Freezers adapt to daily use by cooling and defrosting only when needed. This means your refrigerator uses the energy it needs without compromising on food care.

Appealing Illumination

Bright LEDs light up the ceiling, shelves, bins and tray in both refrigerator and freezer, making it easy to find your food and creating a welcoming glow in your kitchen for those midnight snacks.

Design Quality

The premium design and quality finish includes a white or stainless steel interior lining, as well as full-extension metal shelf runners for easy access and robust glass shelving.

Easy Install

Integrated Column Refrigerators and Freezers have been developed to make their installation easy. The joiner kit is included when pairing refrigerator and freezers. All models come with front adjustable levelling feet and they've been designed to easily slide into place as separate units.

Perfect Fit

These models fit flush and have only ¼" gaps around them with no visible hinges or grilles. Our Integrated Column models can be seamlessly hidden behind your cabinetry or you can purchase our stainless steel door panel.

SPECIFICATIONS

Accessories (sold separately)

QUICK REFERENCE GUIDE > RS2484SL1

| Handle kit Classic | AHCLRDSF |
|--|-----------------------------|
| Handle kit Contemporary round, aluminium | AHSRDSF |
| Handle kit Contemporary square fine, aluminium | AHD5RDSF |
| Handle kit Contemporary square fine, black | AHD5RDSFB |
| Handle kit Professional round flush | AHP3RDSF |
| Handle kit Professional round flush, Brass off-stands | AHP3RDSFBA |
| Handle kit Professional round flush, Dark Copper off-stands | AHP3RDSFDC |
| Joiner Kit | AJ-RS84LR |
| Stainless steel door panel | 24" Left hinge RD2484L4D |
| Toe kick stainless steel 24" | AKRS2404 |
| Toe kick stainless steel 42" | AKRS4204 |
| Toe kick stainless steel 48" | AKRS4804 |
| Toe kick stainless steel 54" | AKRS5404 |
| Toe kick stainless steel 60" | AKRS6004 |
| Toe kick stainless steel 66" | AKRS6604 |
| Toe kick stainless steel 72" | AKRS7204 |
| Toe kick stainless steel 78" | AKRS7804 |
| Toe kick stainless steel 84" | AKRS8404 |
| | |

| Capacity | |
|----------------------|------------|
| Total gross capacity | 12.4 cu ft |
| Volume | 12.4 cu ft |
| Volume refrigerator | 12.4 cu ft |
| Consumption | |
| | |

Energy star

232kWh/year

| Energy rating | |
|---------------|--|
| Energy usage | |

| In-use energy carbon emissions estimate | 28.6kgCO2e/year |
|---|--------------------------|
| Features | |
| Adjustable door shelves | 4 |
| Adjustable glass cantilevered shelves | • |
| Adjustable glass shelves | 4 |
| Covered door shelves | 1 |
| Door alarm | • |
| Fruit and vegetable bins | 4 |
| Gallon door shelves | 1 |
| LED bin lighting | • |
| LED ceiling lighting | • |
| LED lighting | |
| LED side lighting | |
| SmartTouch interface at counter height | • |
| Soft-close fruit and vegetable bins | • |
| Stackable bottle holders | 4 |
| Performance | |
| ActiveSmart™ Foodcare | • |
| Dual evaporator | • |
| Frost free | |
| Humidity control system | |
| Inverter controlled compressor | |
| Sabbath mode | |
| Variable food modes | Pantry; Fridge; Chill |
| Variable temperature zones | 2 |
| | |

Power requirements

| Rated current | 10 A |
|------------------|-------|
| Supply frequency | 60 Hz |
| Supply voltage | 115 V |

Product dimensions

| | 24 " |
|---|-------------------------------|
| Height | 84 " |
| Width | 23 3/4 " |
| Product information | |
| Packaged weight | 275 lbs |
| Unpackaged weight | 258 lbs |
| | |
| Warranty | |
| Warranty Parts and labor | 2 years |
| Warranty Parts and labor Sealed system parts & labor | 2 years additional 3 years |

product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020

Other product downloads available at fisherpaykel.com

- 2D-DWG Integrated Column Refrigerator
- ↓ 2D-DXF Integrated Column Refrigerator
- ↓ Data Sheet Integrated Column Refrigerator
- ↓ Data Sheet Integrated Column Refrigerator Dual Install (18" + 24")
- ↓ Data Sheet Integrated Column Refrigerator Dual Install (24" + 24")
- ↓ Data Sheet Integrated Column Refrigerator Dual Install (24" + 30")
- Service & Warranty
- Installation Guide
- Installation Guide Toe Kick
- ↓ Guide d'installation Instructions de Remplacement du Filtre à Eau FR
- ↓ Guide d'installation FR
- ↓ Installation Guide
- Key Purchase Decisions Integrated Column Refrigerator
- Planning Guide Integrated Column Refrigerator
- Revit Refrigerator

 \downarrow

 $\overline{1}$

 $\overline{\mathbf{1}}$

 $\overline{\mathbf{h}}$

 $\overline{\uparrow}$

 $\overline{\mathbf{1}}$

₹ T

 $\overline{\uparrow}$

 $\mathbf{1}$

 \uparrow $\overline{\uparrow}$

- Rhino Refrigerator
- SketchUp Refrigerator
- Specification Guide Integrated Column Refrigerator
- User Guide EN
- Guide d'utilisation FR
- ↓ User Guide
- ↓ Guide d'utilisation FR

Where applicable:

All appliances use energy, and energy usage typically generates carbon emissions. Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.



A PEACE OF MIND SALE 24 Hours 7 Days a Week Customer Support

T 1.888.936.7872 Wwww.fisherpaykel.com