

FISHER & PAYKEL

PRELIMINARY SPECIFICATION GUIDE

SINGLE DISHDRAWER™ DISHWASHER, TALL



Black Stainless Steel Doors



Stainless Steel Doors



Matte Black Glass Doors

OVERVIEW

Our built-under DishDrawer™ Dishwashers are installed flush under the benchtop, ensuring minimal gaps. Designed to match the Fisher & Paykel family of kitchen appliances with recessed handles for a streamlined look. With a combination of clever technology and simple mechanics, this series 9 DishDrawer™ Dishwasher ensures greater reliability and better wash performance.

* Energy and water rating to be confirmed

* Noise subject to change

MODELS

Recessed Handle, Single Tall DishDrawer 60cm, Black Stainless Steel doors, Top of door User Interface
DD60ST4NB9, DD60ST4HNB9*

Recessed Handle, Single Tall DishDrawer 60cm, Stainless Steel doors, Top of door User Interface
DD60ST4NX9, DD60ST4HNX9*

Recessed Handle, Single Tall DishDrawer 60cm, Matte Black Glass doors, Top of door User Interface
DD60ST4ZB9, DD60ST4HZB9*

* Only available in some markets

SERIES & STYLE

Series 9

Contemporary

FEATURES

- ① Designed to be installed under the benchtop, with a recessed handle for a seamless look
- ② Flush fit with cabinetry with the option, ensuring minimal gaps
- ③ The touch-sensitive control panel is located inside, leaving an uninterrupted exterior
- ④ Place anywhere in the kitchen at bench height for easy loading and minimal bending
- ⑤ Six wash programs, as well as additional Quick, Sanitize and Extra Dry modifiers
- ⑥ Conveniently knock on the dishwasher door to pause the cycle
- ⑦ Running at a low decibel rating, this dishwasher does the job without making a fuss
- ⑧ Flexible racking allows for shelf customisation to suit
- ⑨ With extra height for taller dishes, and customisable internal shelving
- ⑩ Wi-Fi enabled and works with the SmartHQ™ app for remote control and notifications

ACCESSORIES

- ① Cutlery basket included


FISHER & PAYKEL

PRELIMINARY SPECIFICATION GUIDE

SINGLE DISHDRAWER™ DISHWASHER, TALL

SPECIFICATIONS

Model No.	DD60ST4NX9, DD60ST4HNNX9 DD60ST4NB9, DD60ST4HNNB9 DD60ST4ZB9, DD60ST4HZB9
Dimensions	H 454mm W 599mm D 573mm
Weight	32kg DD60ST4NX9, DD60ST4HNNX9 DD60ST4NB9, DD60ST4HNNB9 35kg DD60ST4ZB9, DD60ST4HZB9
Electrical	
Supply	220-240VAC, 50Hz
Service	4.2A
Outlet	3-prong grounding type
Plumbing	
Supply	3/4" BSP (GB20)
Pressure	Max. 1 MPa (145psi), min. 0.03 MPa (4.3psi) recommended cold. Max 60°C

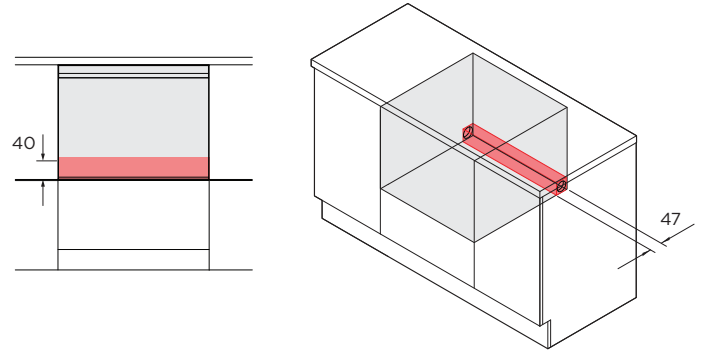


REAR VIEW

ISO VIEW

Service outlet at rear extends both sides, hoses and cords can be routed to either or both sides. Units shown in mm.


PRODUCT DIMENSIONS

CAVITY DIMENSIONS: STANDARD INSTALLATION

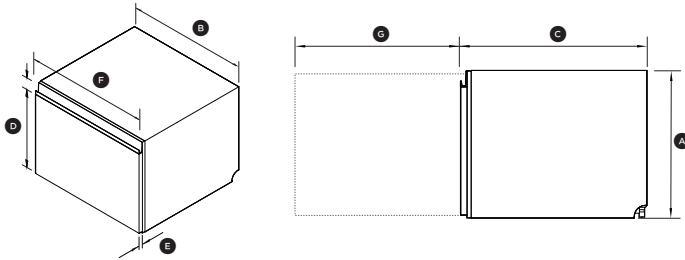

ISO VIEW

PROFILE VIEW

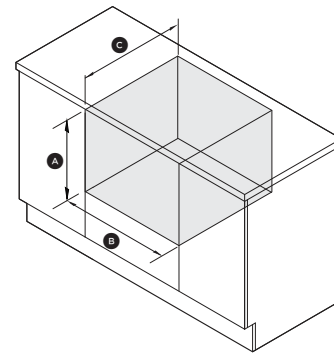

ISO VIEW

	mm
(A) Overall height	454
(B) Overall width	599
(C) Overall depth*	573
(D) Height of front panel	442
(E) Depth of front panel	20
(F) Width of front panel	595
(G) Depth of open drawer	547

*Including front door panel

	mm
(A) Overall height	456
(B) Overall width	600
(C) Overall depth	580