

# FISHER & PAYKEL

## SPECIFICATION GUIDE

## OVEN, 30", SELF-CLEANING



### OVERVIEW

Enhance your kitchen design with the 30" Oven. Refined styling means it matches seamlessly with our Contemporary and Minimal kitchen appliances to create a coherent, considered look and feel. Intuitive controls and the performance to deliver perfect results make this oven beautiful to use.

### MODELS

#### Oven, 30", 17 Function

4.1 cu ft, Stainless Steel, Dial Controls, Touchscreen  
OB30SDPTDX1

#### Oven, 30", 17 Function

4.1 cu ft, Stainless Steel, Touchscreen  
OB30SDPTX1

### SERIES & STYLE

Series 9  
Contemporary

### MODELS

#### Oven, 30", 17 Function

4.1 cu ft, Black, Dial Controls, Touchscreen  
OB30SDPTDB1

#### Oven, 30", 17 Function

4.1 cu ft, Black, Touchscreen  
OB30SDPTB1

### SERIES & STYLE

Series 9  
Minimal

### FEATURES

- ① Designed to fit flush with cabinetry
- ② Styled to perfectly match our Contemporary and Minimal kitchen appliances
- ③ Generous 4.1 cu ft total capacity
- ④ High-resolution, user-friendly touch display
- ⑤ Guided cooking and recipes
- ⑥ Perfect results from a variety of oven functions
- ⑦ Even heat distribution throughout with AeroTech™ technology
- ⑧ Self-cleaning
- ⑨ CoolTouch door

### ACCESSORIES

- ① Full-extension sliding shelves
- ② Self-cleaning-proof side racks
- ③ Roasting dish, tray and rack
- ④ Food probe

# FISHER & PAYKEL


## SPECIFICATION GUIDE

## OVEN, 30", SELF-CLEANING

### SPECIFICATIONS

<b>Model No.</b>	OB30SDPTDB1, OB30SDPTDX1, OB30SDPTB1, OB30SDPTX1
<b>Dimensions</b>	H 27 3/16" (690mm) x W 29 15/16" (760mm) x D 24" (609mm)
<b>Total capacity</b>	4.1 cu ft (115L)
<b>Weight</b>	242lb (110kg)
<b>Electrical</b>	
<b>Supply</b>	208-240VAC, 60Hz
<b>Service</b>	16.6-19.4-amp circuit


### PRODUCT DIMENSIONS

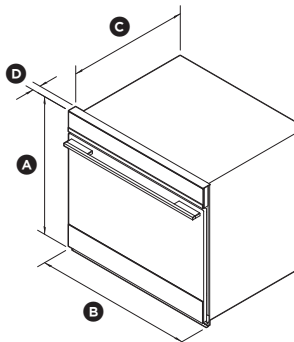

ISO VIEW

		in	mm
(A)	Overall height	27 3/16	690
(B)	Overall width	29 15/16	760
(C)	Depth of chassis	22 7/16	569
(D)	Depth from front of chassis to front of oven door (excl. handle)	1 9/16	40
	Depth of oven door when fully open (measured from front of control panel)	21 11/16	550

### CAVITY DIMENSIONS: STANDARD INSTALLATION

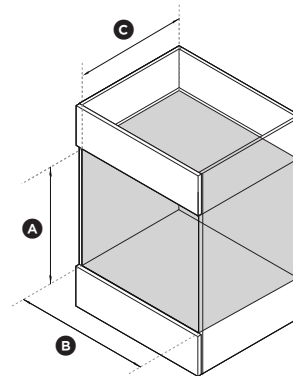

ISO VIEW

		in	mm
(A)	Minimum inside height of cavity	26 13/16	681
(B)	Minimum inside width of cavity	28 1/2	724
(C)	Minimum inside depth of cavity		
	• proud install	22 5/8	575
	• flush install	24 3/16	615