


Warming Drawer, 60cm

Series 9 | Minimal

Grey Glass

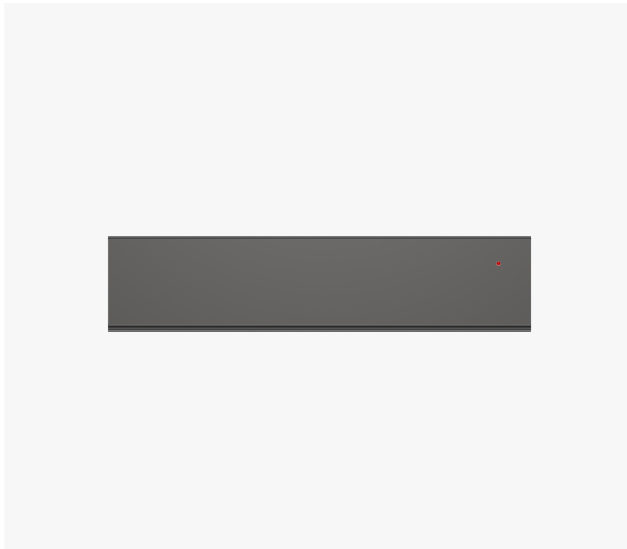

Serve meals hot and directly from a pre-heated plate thanks to our panel-ready, warming drawer.

- Integrates with surrounding cabinetry for a seamless look
- Space to keep six standard-sized place settings evenly warm
- Easy to clean smooth-glass base
- Six versatile tailored programmes for warming, proofing, dehydrating and slow cooking

DIMENSIONS

| | |
|--------|--------|
| Height | 140 mm |
| Width | 596 mm |
| Depth | 567 mm |

FEATURES & BENEFITS

Complementary design

Our Warming Drawer comes with the option of a stylish black glass panel or elegant grey glass panel, for seamless pairing with our Minimal or Contemporary style ovens. Door panel must be purchased separately.

Multi-function flexibility

Choose from six tailored functions including Rapid Proof for proofing dough, Dehydrate for drying foods such as meat, fruit and herbs and Slow Cook, ideal for finishing of seared meats, casseroles, stews and braises.

Precise control

With fast and even heating, our warming drawer is great for keeping food warm and low temperature cooking. You can even rest meat after a traditional roast in the oven and proof dough for bread making and pizza.

Added convenience

Handle-free, push-to-open with intuitive touch controls, our warming drawer gives you the freedom to keep plates or cups warm while you continue to cook.

Easy to clean

Cleaning and care of the warming drawer is simple. After each use, just wipe out the smooth glass interior with a damp cloth.

Safe and sound

With automatic switch-off and delayed start functionality, our warming drawers help keep dishes warm until it is time to serve the main meal.

Sized to suit

With enough room to gently heat six place settings, 20 cappuccino cups or 42 espresso cups, our 60cm warming drawer is an ideal kitchen companion.

SPECIFICATIONS

Capacity

| | |
|--------------------------|--------|
| Cappuccino cups | 20 |
| Espresso cups | 42 |
| Maximum allowable weight | 25 kg |
| Place settings | 6 |
| Usable depth | 408 mm |
| Usable height | 98 mm |
| Usable width | 535 mm |

Cleaning

- Easy clean smooth-glass base

Controls

- Audio feedback
- Automatic pre-set temperatures
- Automatic timers **30', 45', 1h, 2h, 4h, 6h**
- Delayed start
- Electronic capacitive touch controls
- On/Off indicator

| | |
|---------------------------|---|
| Pre-set heating functions | • |
| Push-to-open drawer | • |
| Standby mode | • |

| | |
|--------|---------------|
| Depth | 567 mm |
| Height | 140 mm |
| Width | 596 mm |

Functions

| | |
|---------------------|----------|
| Cups | • |
| Dehydrate | • |
| Number of functions | 6 |
| Plates | • |
| Rapid proof | • |
| Slow cook | • |
| Warm | • |

Safety

| | |
|-----------------------------------|---|
| Automatic turn off after 12 hours | • |
| Full extension slides | • |

SKU 83077

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020

Other product downloads available at fisherpaykel.com

- [↓ 2D-DWG Warming Drawer](#)
- [↓ 2D-DXF Warming Drawer](#)
- [↓ Service & Warranty](#)
- [↓ Installation Guide Warming Drawer DA](#)
- [↓ Installation Guide Warming Drawer DEU](#)
- [↓ Installation Guide Warming Drawer DUT](#)
- [↓ Installation Guide Warming Drawer](#)
- [↓ Installation Guide Warming Drawer FIN](#)
- [↓ Installation Guide Warming Drawer FR](#)
- [↓ Installation Guide Warming Drawer HEB](#)
- [↓ Installation Guide Warming Drawer ITA](#)
- [↓ Installation Guide Warming Drawer NOR](#)

- [↓ Installation Guide Warming Drawer SWE](#)
- [↓ User Guide Warming Drawer DA](#)
- [↓ User Guide Warming Drawer DEU](#)
- [↓ User Guide Warming Drawer DUT](#)
- [↓ User Guide Warming Drawer](#)
- [↓ User Guide Warming Drawer FIN](#)
- [↓ User Guide Warming Drawer FR](#)
- [↓ User Guide Warming Drawer HEB](#)
- [↓ User Guide Warming Drawer ITA](#)
- [↓ User Guide Warming Drawer NOR](#)
- [↓ User Guide Warming Drawer SWE](#)

Where applicable:

All appliances use energy, and energy usage typically generates carbon emissions. **Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate** indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.



A PEACE OF MIND SALE
24 Hours 7 Days a Week Customer Support
 T 08000886605 W www.fisherpaykel.com

Performance

| | |
|---------------------------|------------------|
| Heated glass base and fan | • |
| Low temperature cooking | • |
| Temperature levels | 6 |
| Temperature range | 35°C-85°C |

Power requirements

| | |
|-------------------|----------------|
| Amperage | 10 A |
| Power cord length | 1800 mm |
| Supply frequency | 50 Hz |
| Supply voltage | 220 V |

Product dimensions

| | |
|---|---|
| Adjustable front door panel to align with surrounding cabinetry | • |
|---|---|