


30" Series 9 Contemporary Warming Drawer

Series 9 | Contemporary

Stainless Steel

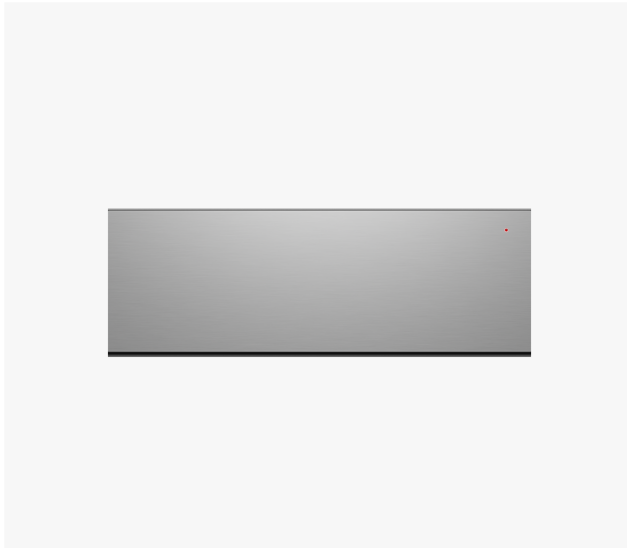

Serve meals hot and directly from a pre-heated plate thanks to our panel-ready, warming drawer.

- Integrates with surrounding cabinetry for a seamless look
- Space to keep six standard-sized place settings evenly warm
- Easy to clean smooth-glass base
- Six versatile tailored programmes for warming, proofing, dehydrating and slow cooking

DIMENSIONS

| | |
|--------|------------|
| Height | 10 11/16 " |
| Width | 29 15/16 " |
| Depth | 22 5/16 " |

FEATURES & BENEFITS

Complementary Design

This Warming Drawer comes in a stylish stainless steel finish, for seamless pairing with our Contemporary style ovens.

Multi-Function Flexibility

Choose from six tailored functions, including Rapid Proof for dough proofing and Dehydrate for drying foods like meat, fruit, and herbs. The Slow Cook function is ideal for finishing seared meats, casseroles, stews, and braises.

Precise Control

Our warming drawer delivers quick, even heating, ideal for keeping food warm and low-temperature cooking. You can also use it for resting roasted meat and proofing dough for bread or pizza bases.

Added Convenience

With intuitive touch controls and a handle-free, push-to-open design, our warming drawer gives you the freedom to keep plates or cups warm while you continue to cook.

Easy To Clean

Cleaning and care of the warming drawer is easy. After each use, simply wipe out the smooth glass interior with a damp cloth.

Safe And Sound

With automatic switch-off and delayed start functionality, our warming drawers help keep dishes warm until it is time to serve the main meal.

Sized To Suit

With enough room to gently heat six place settings, 20 cappuccino cups or 42 espresso cups, our warming drawer is an ideal kitchen companion.

SPECIFICATIONS

Accessories (included)

| | |
|------------|---|
| Wire shelf | 1 |
|------------|---|

Capacity

| | |
|---|-----------|
| Accessory rack maximum allowable weight | 42lb |
| Cappuccino cups | 24 |
| Espresso cups | 54 |
| Maximum allowable weight | 55 lbs |
| Place settings | 16 |
| Usable depth | 16 1/16 " |
| Usable height | 9 1/16 " |
| Usable width | 27 1/2 " |

Cleaning

| | |
|------------------------------|---|
| Easy clean smooth-glass base | • |
|------------------------------|---|

Controls

| | |
|----------------|---|
| Audio feedback | • |
|----------------|---|

| | |
|--------------------------------------|--------------------------|
| Automatic timers | 30', 45', 1h, 2h, 4h, 6h |
| Electronic capacitive touch controls | • |
| On/Off indicator | • |
| Pre-set heating functions | • |
| Push-to-open drawer | • |
| Soft close drawer | • |
| Standby mode | • |

Functions

| | |
|---------------------|---|
| Cups | • |
| Dehydrate | • |
| Number of functions | 6 |
| Plates | • |
| Rapid proof | • |
| Slow cook | • |
| Warm | • |

Performance

| | |
|---------------------------|------------|
| Heated glass base and fan | • |
| Low temperature cooking | • |
| Temperature levels | 6 |
| Temperature range | 95°F-185°F |

Power Requirements

| | |
|------------------|------------------------|
| Amperage | 10 A |
| Power outlet | 3-prong grounding-type |
| Supply frequency | 60 Hz |

| | |
|----------------|-------|
| Supply voltage | 110 V |
|----------------|-------|

Product Dimensions

| | |
|---|------------|
| Adjustable front door panel to align with surrounding cabinetry | • |
| Depth | 22 5/16 " |
| Height | 10 11/16 " |
| Width | 29 15/16 " |

Safety

| | |
|-----------------------------------|---|
| Automatic turn off after 12 hours | • |
| Full extension slides | • |

| | |
|-----|-------|
| SKU | 84235 |
|-----|-------|

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020

Other product downloads available at fisherpaykel.com

- ↓ 2D-DWG Warming Drawer
- ↓ 2D-DXF Warming Drawer
- ↓ Service & Warranty
- ↓ Planning Guide EN - Contemporary 30" Built-in Ovens and Companions

- ↓ Planning Guide EN - Minimal 30" Built-in Ovens and Companions
- ↓ Planning Guide FR - Contemporary 30" Built-in Ovens and Companions
- ↓ Planning Guide FR - Minimal 30" Built-in Ovens and Companions
- ↓ Planning Guide SP - Contemporary 30" Built-in Ovens and Companions
- ↓ Planning Guide SP - Minimal 30" Built-in Ovens and Companions
- ↓ Revit 20 Warming Drawer
- ↓ User Guide Warming Drawer
- ↓ User Guide Warming Drawer FR
- ↓ User Guide Warming Drawer SP

Where applicable:

All appliances use energy, and energy usage typically generates carbon emissions. **Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate** indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.



A PEACE OF MIND SALE
 24 Hours 7 Days a Week Customer Support
 T 1.888.936.7872 Wwww.fisherpaykel.com