


# 24" Series 9 Minimal Warming Drawer

Series 9 | Minimal

Black Glass

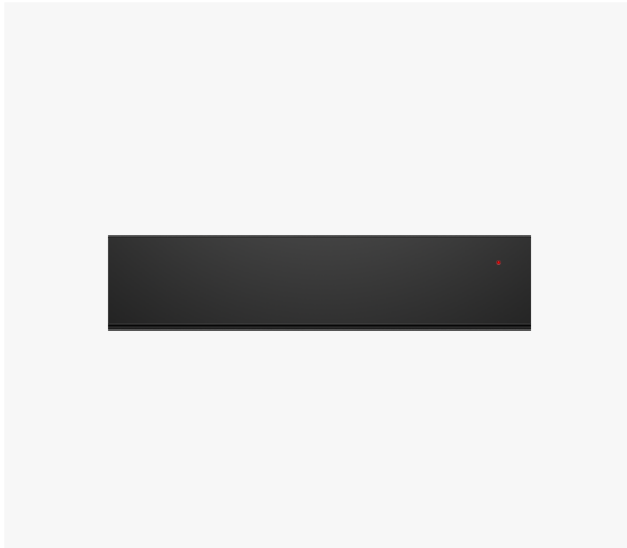

Serve meals hot and directly from a pre-heated plate thanks to our panel-ready, warming drawer.

- Integrates with surrounding cabinetry for a seamless look
- Space to keep six standard-sized place settings evenly warm
- Easy to clean smooth-glass base
- Six versatile tailored programmes for warming, proofing, dehydrating and slow cooking

## DIMENSIONS

Height	5 1/2 "
Width	23 7/16 "
Depth	22 5/16 "

## FEATURES & BENEFITS

### Complementary Design

Our Warming Drawer comes with the option of a stylish black glass panel or elegant grey glass panel, for seamless pairing with our Minimal or Contemporary style ovens. Door panel must be purchased separately.

### Multi-Function Flexibility

Choose from six tailored functions including Rapid Proof for proofing dough, Dehydrate for drying foods such as meat, fruit and herbs and Slow Cook, ideal for finishing of seared meats, casseroles, stews and braises.

### Precise Control

With fast and even heating, our warming drawer is great for keeping food warm and low temperature cooking. You can even rest meat after a traditional roast in the oven and proof dough for bread making and pizza.

### Added Convenience

Handle-free, push-to-open with intuitive touch controls, our warming drawer gives you the freedom to keep plates or cups warm while you continue to cook.

### Easy To Clean

Cleaning and care of the warming drawer is simple. After each use, just wipe out the smooth glass interior with a damp cloth.

### Safe And Sound

With automatic switch-off and delayed start functionality, our warming drawers help keep dishes warm until it is time to serve the main meal.

### Sized To Suit

With enough room to gently heat six place settings, 20 cappuccino cups or 42 espresso cups, our 60cm warming drawer is an ideal kitchen companion.

## SPECIFICATIONS

### Capacity

Cappuccino cups	20
Espresso cups	42
Maximum allowable weight	55 lbs
Place settings	6
Usable depth	16 1/16 "
Usable height	3 7/8 "
Usable width	21 1/16 "

### Cleaning

- Easy clean smooth-glass base

### Controls

- Audio feedback
- Automatic timers **30', 45', 1h, 2h, 4h, 6h**
- Electronic capacitive touch controls
- On/Off indicator
- Pre-set heating functions
- Push-to-open drawer

- Soft close drawer
- Standby mode

Depth	22 5/16 "
Height	5 1/2 "
Width	23 7/16 "

**Functions**

- Cups
- Dehydrate
- Number of functions **6**
- Plates
- Rapid proof
- Slow cook
- Warm

**Safety**

- Automatic turn off after 12 hours
- Full extension slides

SKU 84230

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020

**Other product downloads available at fisherpaykel.com**

- ↓ 2D-DWG Warming Drawer
- ↓ 2D-DXF Warming Drawer
- ↓ Service & Warranty
- ↓ Planning Guide EN
- ↓ Planning Guide FR
- ↓ Planning Guide SP
- ↓ User Guide Warming Drawer
- ↓ User Guide Warming Drawer FR
- ↓ User Guide Warming Drawer SP

Where applicable:

All appliances use energy, and energy usage typically generates carbon emissions. **Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate** indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.



**A PEACE OF MIND SALE**  
**24 Hours 7 Days a Week Customer Support**  
 T 1.888.936.7872 Wwww.fisherpaykel.com

**Performance**

- Heated glass base and fan
- Low temperature cooking
- Temperature levels **6**
- Temperature range **95°F-185°F**

**Power Requirements**

- Amperage **10 A**
- Power outlet **3-prong grounding-type**
- Supply frequency **60 Hz**
- Supply voltage **110 V**

**Product Dimensions**

- Adjustable front door panel to align with surrounding cabinetry