


60cm Series 9 Contemporary Warming Drawer

Series 9 | Contemporary

Black Glass

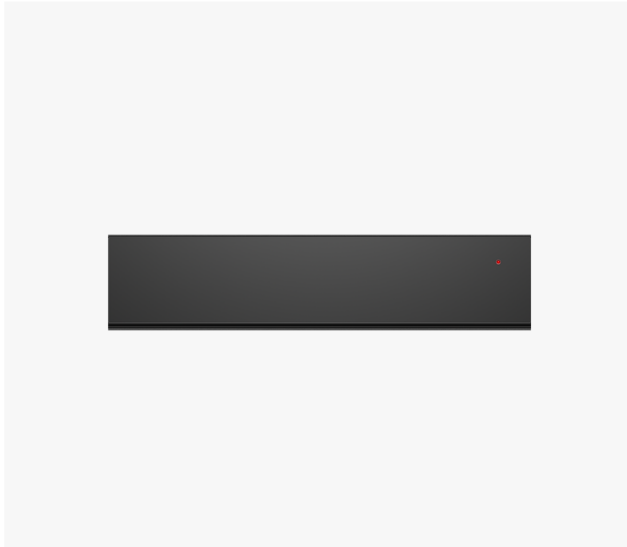

Serve meals hot and directly from a pre-heated plate thanks to our panel-ready, warming drawer.

- Integrates with surrounding cabinetry for a seamless look
- Space to keep six standard-sized place settings evenly warm
- Easy to clean smooth-glass base

- Six versatile tailored programmes for warming, proofing, dehydrating and slow cooking

DIMENSIONS

| | |
|--------|--------|
| Height | 140 mm |
| Width | 596 mm |
| Depth | 567 mm |

FEATURES & BENEFITS

Complementary Design

This Warming Drawer comes in a stylish black reflective glass finish, for seamless pairing with our Contemporary style ovens.

Multi-Function Flexibility

Choose from six tailored functions, including Rapid Proof for dough proofing and Dehydrate for drying foods like meat, fruit, and herbs. The Slow Cook function is ideal for finishing seared meats, casseroles, stews, and braises.

Precise Control

Our warming drawer delivers quick, even heating, ideal for keeping food warm and low-temperature cooking. You can also use it for resting roasted meat and proofing dough for bread or pizza bases.

Added Convenience

With intuitive touch controls and a handle-free, push-to-open design, our warming drawer gives you the freedom to keep plates or cups warm while you continue to cook.

Easy To Clean

Cleaning and care of the warming drawer is easy. After each use, simply wipe out the smooth glass interior with a damp cloth.

Safe And Sound

With automatic switch-off and delayed start functionality, our warming drawers help keep dishes warm until it is time to serve the main meal.

Sized To Suit

With enough room to gently heat six place settings, 20 cappuccino cups or 42 espresso cups, our 60cm warming drawer is an ideal kitchen companion.

SPECIFICATIONS

Capacity

| | |
|--------------------------|--------|
| Cappuccino cups | 20 |
| Espresso cups | 42 |
| Maximum allowable weight | 25 kg |
| Place settings | 6 |
| Usable depth | 408 mm |
| Usable height | 98 mm |
| Usable width | 535 mm |

Cleaning

- Easy clean smooth-glass base

Controls

- Audio feedback
- Automatic pre-set temperatures

| | |
|--------------------------------------|--------------------------|
| Automatic timers | 30', 45', 1h, 2h, 4h, 6h |
| Delayed start | • |
| Electronic capacitive touch controls | • |
| On/Off indicator | • |
| Pre-set heating functions | • |
| Push-to-open drawer | • |
| Standby mode | • |

Product dimensions

| | |
|---|--------|
| Adjustable front door panel to align with surrounding cabinetry | • |
| Depth | 567 mm |
| Height | 140 mm |
| Width | 596 mm |

Safety

| | |
|-----------------------------------|---|
| Automatic turn off after 12 hours | • |
| Full extension slides | • |

Warranty

| | |
|------------------|---------|
| Parts and labour | 2 years |
|------------------|---------|

| | |
|-----|-------|
| SKU | 84227 |
|-----|-------|

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020

Other product downloads available at fisherpaykel.com

- [↓](#) 2D-DWG Warming Drawer
- [↓](#) 2D-DXF Warming Drawer
- [↓](#) Service & Warranty
- [↓](#) Planning Guide - Handleless Ovens and Companions

[↓](#) User Guide Warming Drawer

Where applicable:

All appliances use energy, and energy usage typically generates carbon emissions. **Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate** indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.



A PEACE OF MIND SALE
 24 Hours 7 Days a Week Customer Support
 T 0800 372 273 W www.fisherpaykel.com

Functions

| | |
|---------------------|---|
| Cups | • |
| Dehydrate | • |
| Number of functions | 6 |
| Plates | • |
| Rapid proof | • |
| Slow cook | • |
| Warm | • |

Performance

| | |
|---------------------------|-----------|
| Heated glass base and fan | • |
| Low temperature cooking | • |
| Temperature levels | 6 |
| Temperature range | 35°C-85°C |

Power requirements

| | |
|-------------------|---------|
| Amperage | 10 A |
| Power cord length | 1800 mm |
| Supply frequency | 50 Hz |
| Supply voltage | 220 V |